


1×2, 2×2 Multi-mode Fiber Coupler 850nm

The 850nm 1×2, 2×2 Multi-mode Fused Fiber Coupler is built by using fused biconical taper (FBT) technology. It can be used to split the input signal at various ratios with low insertion loss. 50/125, 62.5/125, OM3 multimode fibers are available.

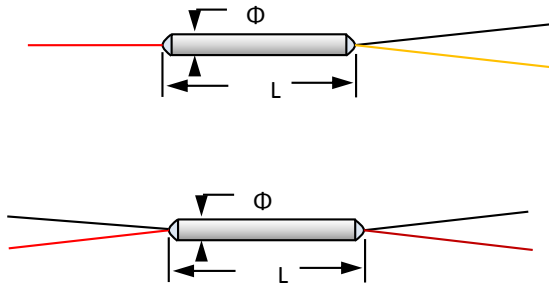

Features

- Low Excess Loss
- Broadband
- High Reliability & Stability
- Various Coupling Ratio

Applications

- CATV
- Long-haul Telecom
- Local Area Network
- Fiber Sensor
- Lab & Research

Performance Specification

Parameter	Value	Unit
Configuration	1X2, 2X2, or 1XN	
Center Wavelength	850	nm
Bandwidth	±40	nm
Max. Excess Loss	0.7	dB
Max. Insertion Loss	50/50	3.7/3.7 dB
	40/60	4.7/2.7 dB
	30/70	6.0/2.1 dB
	20/80	7.8/1.4 dB
	10/90	11.2/0.9 dB
	5/95	14.5/0.7 dB
	2/98	18.6/0.6 dB
	1/99	22.0/0.5 dB
Max. Uniformity (50/50)	0.5	dB
Min. Directivity	40	dB
Fiber Type	50/125um, 62.5/125um, OM3 Multi-mode Fiber	
Operating Temperature	-40 to +80	°C
Storage Temperature	-50 to +85	°C
Package Dimension	Φ3.0×L54	mm

Note

* Above specifications are for device without connectors.

* Specifications may change without notice.

Ordering Information

MMC-AAA-BB-CC-DD-E-FF-GG

AAA	BB	CC	DD	E	FF	GG
Wavelength	Port	Coupling Ratio	Fiber Type	Fiber Jacket	Fiber Length	Connector
850 - 850nm	12 - 1X2	01 - 01/99	50 - 50/125um Fiber	B - 250um Bare	05 - 0.5m	NE - None
SSS - Specify	22 - 2X2	02 - 02/98	62 - 62.5/125um Fiber	Tube	08 - 0.8m	FA - FC/APC
	SS - Specify	04 - 04/96	OM - OM3 Fiber	L - 900um Loose	10 - 1.0m	FP - FC/PC
		05 - 05/95	SS - Specify	Tube	15 - 1.5m	SA - SC/APC
		10 - 10/90		C - 3.0mm Cable	SS - Specify	SP - SC/PC
		20 - 20/80				LA - LC/APC
		30 - 30/70				LP - LC/PC
		50 - 50/50				SS - Specify
		SS - Specify				