


1×2, 2×2 Fused Polarization Maintaining Coupler 1053nm

The 1050, 1053nm 1×2, 2×2 Fused Polarization Maintaining (PM) Coupler is built by using fused biconical taper (FBT) technology. It can be used to split the input signal at various ratios while preserving the polarization with high extinction ratio. High power handling up to 2W as normal and up to 5W or higher is available upon

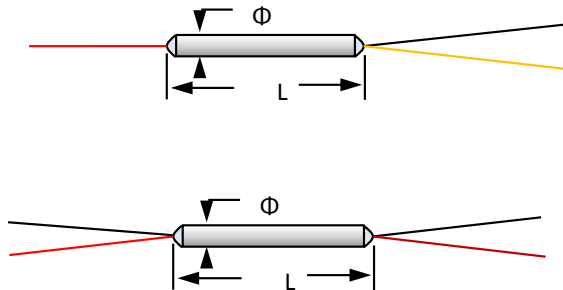

Features

- Low Excess Loss
- High Polarization Extinction Ratio (PER)
- high Power Handling
- Compliant to Telcordia GR-1221-CORE

Applications

- Fiber Amplifier
- Fiber Sensor
- Power Monitoring
- Fiber Laser
- Lab & Research

Performance Specification

Parameter	Value	Unit
Configuration	1X2, 2X2	
Center Wavelength	1050, 1053 or customized	nm
Bandwidth	±15	nm
Typ. Excess Loss	0.4	dB
Max. Excess Loss	0.6	dB
for CR>10% Port	20	dB
Min. PER for 10%≥CR>5% Port	18	dB
for CR≤5% Port	16	dB
Max. Coupling Ratio Tolerance	99/1±0.4%, 90/10±2.5%, 80/20±2.9%, 70/30±3.5%	
Min. Directivity	55	dB
Min. Return Loss	50	dB
Max. Optical Power (Continuous Wave)	2 (higher is available upon request)	W
Max. Tensile Load	5	N
Fiber Type	PM Panda Fiber on Input & Output Port	
Operating Temperature	-40 to +80	℃
Storage Temperature	-50 to +85	℃
Package Dimension	Φ3.0×L35 for bare fiber, and Φ3.0×L54 for 900um loose tube	mm

Note

* Test at center wavelength without connector. For devices with connectors, EL will be 0.2dB higher, and PER will be 2dB lower.
 * Available for fast axis operating or slow axis operating. If you need both axis operating please contact us.
 * The PM fiber and the connector key are aligned to the slow axis.

Ordering Information

FPMC-AAAA-BB-CC-DD-E-FF-GG-H

AAAA	BB	CC	DD	E	FF	GG	H
Wavelength	Port	Coupling Ratio	Fiber Type on Tap Port	Fiber Jacket	Fiber Length	Connector	Working Axis
1030 - 1030nm	12 - 1X2	01 - 01/99	PM - PM Panda Fiber	B - 250um Bare	05 - 0.5m	NE - None	F - Fast Axis
1040 - 1040nm	22 - 2X2	02 - 02/98	H6 - HI 1060 Fiber	Fiber	08 - 0.8m	FA - FC/APC	Operating
1053 - 1053nm		04 - 04/96	SS - Specify	L - 900um Loose	10 - 1.0m	FP - FC/PC	S - Slow Axis
1064 - 1064nm		05 - 05/95		Tube	15 - 1.5m	SA - SC/APC	Operating
SSSS - Specify		10 - 10/90		C - 3.0mm Cable	SS - Specify	SP - SC/PC	
		20 - 20/80				LA - LC/APC	
		30 - 30/70				LP - LC/PC	
		50 - 50/50				SS - Specify	
		SS - Specify					