


1×2, 2×2 Fused Polarization Maintaining Coupler 2000nm

The 2000nm (2 micron, 2μm) 1×2, 2×2 Fused Polarization Maintaining (PM) Fiber Optic Coupler is built by using fused biconical taper (FBT) technology. It can be used to split the input signal at various ratios while preserving the polarization with high extinction ratio. High power handling up to 2W as normal and up to 5W or higher is available upon request.

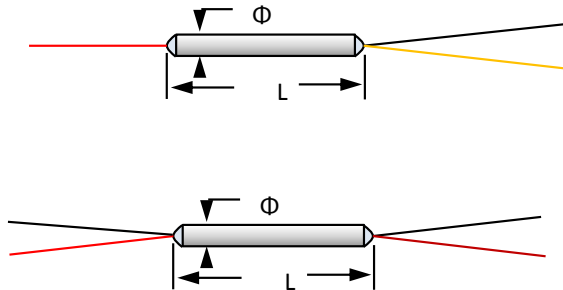

Features

- Low Excess Loss
- High Polarization Extinction Ratio (PER)
- high Power Handling
- Operating on both fast and slow axis

Applications

- Fiber Amplifier
- Fiber Sensor
- Power Monitoring
- Fiber Laser
- Lab & Research

Performance Specification

Parameter	Value	Unit
Configuration	1X2, 2X2	
Center Wavelength	2000 or customized	nm
Bandwidth	±10	nm
Typ. Excess Loss	0.5	dB
Max. Excess Loss	0.8	dB
for CR>10% Port	20	dB
Min. PER for 10%≥CR>5% Port	18	dB
for CR≤5% Port	16	dB
Max. Coupling Ratio Tolerance	99/1±0.4%, 90/10±2.5%, 80/20±2.9%, 70/30±3.5%	
Min. Directivity	50	dB
Min. Return Loss	50	dB
Max. Optical Power (Continuous Wave)	2	W
Max. Tensile Load	5	N
Fiber Type	PM Panda Fiber on Input & Output Port	
Operating Temperature	-40 to +80	°C
Storage Temperature	-50 to +85	°C
Package Dimension	Φ3.0×L60 for bare fiber, and Φ3.0×L76 for 900um loose tube	mm

Note

* Test at center wavelength without connector. For devices with connectors, EL will be 0.3dB higher, and PER will be 2dB lower.

* Both axis operating.

* The PM fiber and the connector key are aligned to the slow axis.

Ordering Information

FPMC-AAAA-BB-CC-DD-E-FF-GG-H

AAAA	BB	CC	DD	E	FF	GG	H
Wavelength	Port	Coupling Ratio	Fiber Type on Tap Port	Fiber Jacket	Fiber Length	Connector	Working Axis
2000 - 2000nm	12 - 1X2	01 - 01/99	PM - PM Panda Fiber	B - 250um Bare Fiber	05 - 0.5m	NE - None	B - Both Axis
SSSS - Specify	22 - 2X2	02 - 02/98	SS - Specify	Fiber	08 - 0.8m	FA - FC/APC	Operating
		04 - 04/96		L - 900um Loose Tube	10 - 1.0m	FP - FC/PC	
		05 - 05/95			15 - 1.5m	SA - SC/APC	
		10 - 10/90		C - 3.0mm Cable	SS - Specify	SP - SC/PC	
		20 - 20/80				LA - LC/APC	
		30 - 30/70				LP - LC/PC	
		50 - 50/50				SS - Specify	
		SS - Specify					