


## Polarization Independent Optical Isolator 930 940 950nm

The 930 940 950nm High Power Polarization Independent (Polarization Insensitive) Optical Fiber Isolator is an in-line pigtailed micro-optic component that allows light to be transmitted only in the forward direction while blocking the backward transmission. It features high isolation, low insertion loss and high power handling. The optical isolators are commonly used to protect lasers or amplifiers against back-reflected light.

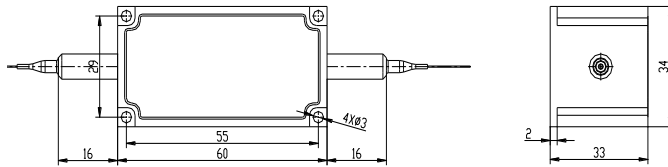

### Features

- High Isolation
- Low Insertion Loss
- High Power Handling

### Applications

- Fiber Amplifier
- Fiber Laser & Sensor
- Lab & Research

### Performance Specification

Parameter	Value	Unit
Center Wavelength	930 940 950 or customized	nm
Bandwidth	±10	nm
Typ. Insertion Loss at 23°C	0.9	dB
Max. Insertion Loss at 23°C	1.5	dB
Typ. Peak Isolation	28-32	dB
Min. Isolation at 23°C	22	dB
Max. PDL at 23°C	0.2	dB
Min. Return Loss	50	dB
Max. Optical Power (CW)	0.5, 1, 2, 3, 5, 10	W
Max. Tensile Load	5	N
Fiber Type	HI 1060 Fiber	
Operating Temperature	-5 to +50	°C
Storage Temperature	-20 to +75	°C
Package Dimension		mm

### Note

- \* For devices with connectors, IL will be 0.3dB higher and RL will be 5dB lower.
- \* For pulse applications, pls discuss with OF-LINK.
- \* Connectors only CW 1W handling power guarantee.
- \* Package size subject to change without notice.

### Ordering Information

#### HP11-AAA-BB-C-DD-EE-FF

AAA	BB	C	DD	EE	FF
Wavelength	Fiber Type	Fiber Jacket	Fiber Length	Connector	Power
930 - 930nm	H6 - HI 1060 Fiber	B - 250um Bare	05 - 0.5m	NE - None	Z5 - 0.5W
940 - 940nm	SS - Specify	Fiber	08 - 0.8m	FA - FC/APC	01 - 1W
950 - 950nm		L - 900um Loose	10 - 1.0m	FP - FC/PC	03 - 3W
SSS - Specify		Tube	15 - 1.5m	SA - SC/APC	05 - 5W
			SS - Specify	SP - SC/PC	10 - 10W
				LA - LC/APC	SS - Specify
				LP - LC/PC	
				SS - Specify	