


## Polarization Beam Combiner/Splitter 1950nm

The 1950nm (2 micron, 2μm) Polarization Beam Combiner/Splitter is a micro-optic component designed to combine two orthogonal polarization signals into one single fiber, or, it can also be used to split orthogonal polarizations from a single input fiber (PM fiber or SM fiber) into two output PM fibers. It's widely used in EDFA or Raman Amplifier to enlarge pump power by combining two pump laser signals into a single ouput fiber. High Power handling is available upon request.

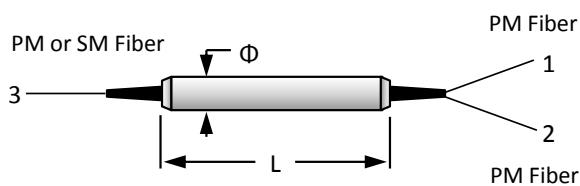

### Features

- Low Insertion Loss
- High Extinction Ratio
- High Reliability & Stability
- High Power available on request

### Applications

- EDFA & Raman Amplifier
- Fiber Sensor
- Combine or Split Orthogonal Polarization
- Test & Measurement

### Performance Specification

Parameter	Value	Unit
Center Wavelength	1950	nm
Bandwidth	±20	nm
Configuration	1X2	
Typ. Insertion Loss	1.0	dB
Max. Insertion Loss	1.3	dB
Min. Extinction Ratio (for splitter only)	20	dB
Min. Directivity	50	dB
Min. Return Loss	50	dB
Max. Optical Power (Continuous Wave)	500 (higher is available upon request)	mW
Max. Tensile Load	5	N
Fiber Type	PM 1950 Panda Fiber on Port 1 & Port 2 PM 1950 Panda Fiber or SMF-28e Fiber on Port 3	
Operating Temperature	-5 to +65	°C
Storage Temperature	-40 to +85	°C
Package Dimension	Φ5.5×L35	mm

### Note

- \* For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower and ER will be 2dB lower.
- \* The PM fiber and the connector key are aligned to the slow axis.
- \* For high power applications, please contact us to confirm details.

### Ordering Information

#### PBCS-AAAA-BB-C-DD-EE

AAAA	BB	C	DD	EE
Wavelength	Fiber Type on Port 3	Fiber Jacket	Fiber Length	Connector
1950 - 1950nm	SM - SMF-28e Fiber	B - 250um Bare	05 - 0.5m	NE - None
SSSS - Specify	P1 - PM Panda Fiber, Slow Axis Aligned 45° to Port 1	Fiber	08 - 0.8m	FA - FC/APC
	P2 - PM Panda Fiber, Slow Axis Aligned to Port 1	L - 900um Loose Tube	10 - 1.0m 15 - 1.5m	FP - FC/PC SA - SC/APC SP - SC/PC LA - LC/APC LP - LC/PC
	SS - Specify		SS - Specify	SS - Specify