


Polarization Maintaining Patch Cord 1625nm

The 1625, 1650nm Polarization Maintaining (PM) Fiber Patch Cord (PM Fiber Jumper, PM fiber Patch Cable) is built with PM panda fiber that has fiber connectors installed on one or both ends, the connector type could be FC/APC, FC/UPC, SC/APC, SC/UPC LC/APC and LC/UPC, and the connector key is aligned to slow axis.

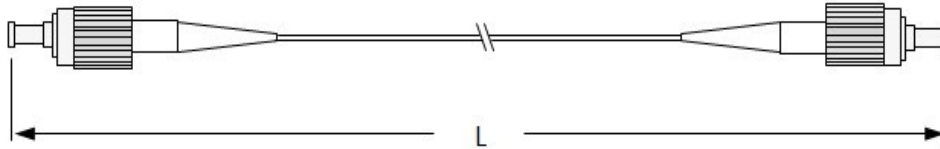

Features

- High Extinction Ratio
- Low IL & RL
- Custom Fiber Length & Connector
- High Reliability & Stability

Applications

- High Speed Telecommunications
- Fiber Sensor
- Fiber Amplifier
- PM Fiber System

Performance Specification

Parameter	Value		Unit
Center Wavelength	1625, 1650 or customized		nm
Connector Polishing Type	PC	APC	
Key Alignment	±3° to Slow Axis		
Key Width (for FC connector)	2.02		mm
Typ. Insertion Loss	0.3	0.4	dB
Max. Insertion Loss	0.5	0.5	dB
Min. Return Loss	50	60	dB
Min. Extinction Ratio	23	23	dB
Fiber Type	PM Panda Fiber or Customized		
Fiber Length Tolerance	10% or Customized		
Fiber Length	L		m
Max. Tensile Load	5		N
Max. Optical Power (Continuous Wave)	300		mW
Operating Temperature	-5 to +70		°C
Storage Temperature	-40 to +85		°C

Note

* The PM fiber and the connector key are aligned to the slow axis.

Ordering Information

PMPC-AAAA-BB-C-DD-EE-FF

AAAA	BB	C	DD	EE	FF
Wavelength	Fiber Type	Fiber Jacket	Fiber Length	Connector 1	Connector 2
1625 - 1625nm	PM - PM Panda Fiber	L - 900um Loose	05 - 0.5m	NE - None	NE - None
1650 - 1650nm	SS - Specify	Tube	08 - 0.8m	FA - FC/APC	FA - FC/APC
SSSS - Specify		2 - 2.0mm Loose	10 - 1.0m	FP - FC/PC	FP - FC/PC
		Tube	15 - 1.5m	SA - SC/APC	SA - SC/APC
		3 - 3.0mm Loose	20 - 2.0m	SP - SC/PC	SP - SC/PC
		Tube	30 - 3.0m	LA - LC/APC	LA - LC/APC
			SS - Specify	LP - LC/PC	LP - LC/PC
			SS - Specify	SS - Specify	